



McDermott Light & Signal

BOB LIGHT (Bridge Outlet Box)

**Meets USCG Requirements
for 33 CFR, 118.65, .70, .80, .85 & .110**

Models: { BOB } { 120
12
24 } { L } { G
R }

Simple and cost effective bridge light features UL Listed
Aluminum Outlet Box for wet locations

SPECIFICATIONS:

Range:	1 - 5 Nautical Miles
Material:	High-impact polycarbonate
Power:	12, 24, 32 DC / 120, 220 AC
Light Source:	LEDs rated up to 50,000 hours

Available in 180° Red, and 360° Green

Available in Wall or Surface Mount



**120
BOB - 12 - R
24**


**Special Screen for double-opening swing bridges
and single opening draw bridges
33 CFR, 118.70 and 118.75**




**120
BOB - 12 - L - 180 - R
24**

ALUMINUM
JUNCTION BOX

UL LISTED SUITABLE FOR
WET LOCATIONS

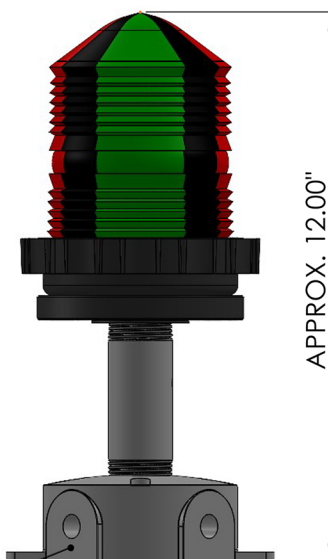

**120
BOB - 12 - RGRG - 4 - 60
24**

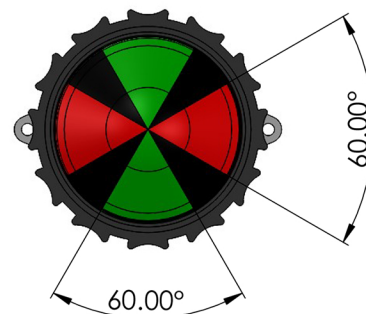

SUFFIXES:

**L = WALL MOUNT
180 = 180° SCREEN**



1639 Stephen Street, Ridgewood, NY 11385 Tel. (718) 456-3606 Fax (718) 381-0229

www.mcdermottlight.com

