



Bridge Swing Light

ADVANTAGES OVER ALL OTHERS

SPECIFICATIONS:

Range: 1 to 3 Miles


Mount: Tube Mount

Light Source: LED

Voltage: 12 VDC; 120, 220 VAC

Colors: Green, Red - 360° or 180° Screen

True Dimensions: 2 1/2" Dia. Stainless Steel
Variable tube lengths

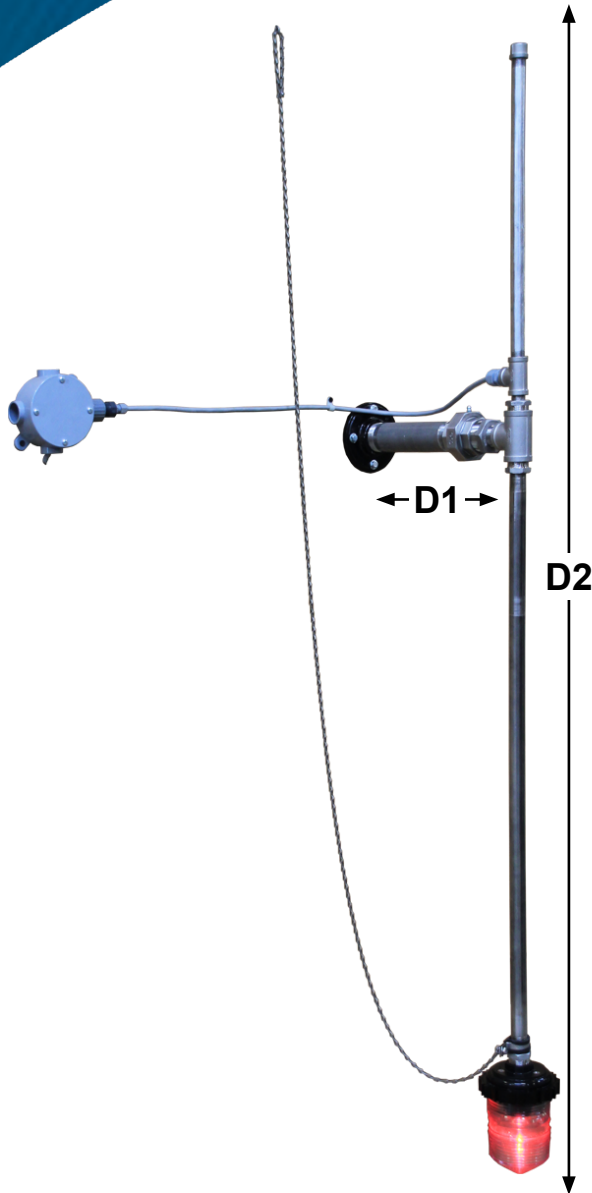

- Quickly retrieve light by operating attached chain.
- Available in 12VDC & 120VAC & 220VAC
- Customizable overhang and dropdown lengths
- All stainless steel tubes with greased fittings
- Available in single or double heads
- High impact polycarbonate LED heads
- 50,000 hours life LEDs
- Certified by USCG approved laboratory to meet CFR 33 Part 66

Models:

BSL-120-1L5V-.2-D1-D2-R

BSL-120-1L5V-.2-D1-D2-G

